


ITEM	DESCRIPTION
1	316 S.S. PROBE
2	ALUMINUM HOUSING
3	HOUSING CAP
4	3/4" NPT WIRE ENTRY
5	SENSITIVITY ADJUSTMENT
6	FAIL SAFE SETTING
7	TIME DELAY

Power Requirements
 95-145 VAC or 19-29 VDC

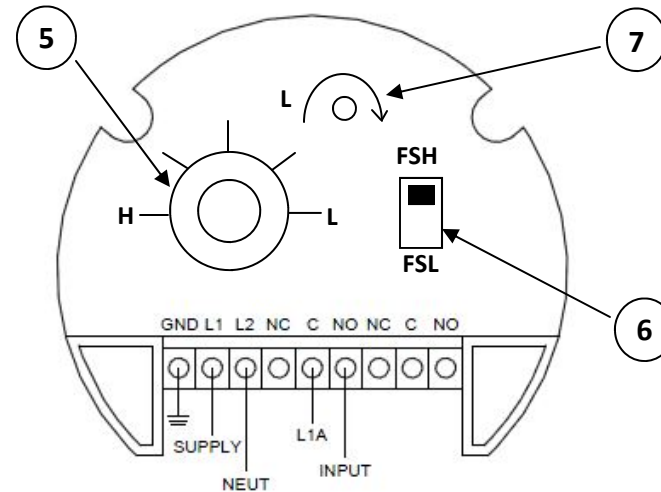

Control Board

Part No.	DESCRIPTION
DF14515X01	120V CAPACITANCE LEVEL CONTROL (175 DEG. F.)
DF14515X02	120V CAPACITANCE LEVEL CONTROL (350 DEG. F.)
DF14515X24	24V CAPACITANCE LEVEL CONTROL (175 DEG. F.)
DF14515X25	24V CAPACITANCE LEVEL CONTROL (350DEG. F.)

**Proprietary
 And Confidential**

The information contained within this drawing is the sole property of JDB Dense Flow. Any reproduction in part or as a whole without the written permission of JDB Dense Flow is prohibited

**Capacitance
 Level Control**

Data Sheet

CPLC 5:17

